

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 October 2004 (28.10.2004)

PCT

(10) International Publication Number  
WO 2004/092033 A2

(51) International Patent Classification<sup>7</sup>: B65D 47/20 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AB, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KR, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number: PCT/HU2004/000034

(22) International Filing Date: 13 April 2004 (13.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
U0300103 18 April 2003 (18.04.2003) HU  
P0303380 18 April 2003 (18.04.2003) HU

(71) Applicant (for all designated States except US): MAYEX USA INC. [US/US]; 3230 E Flamingo Road, Suite 156, Las Vegas, NV 89121 (US).

(72) Inventor; and


(75) Inventor/Applicant (for US only): LINDMAYER, István [HU/HU]; Homokhegy u. 12, H-7228 Döbrököz (HU).

(74) Agent: POLGÁR, Iván; DeveloPat Patent and Trademark Agency, P.O. Box 21, H-1400 Budapest (HU).

Declaration under Rule 4.17:  
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: DISPENSING CAP

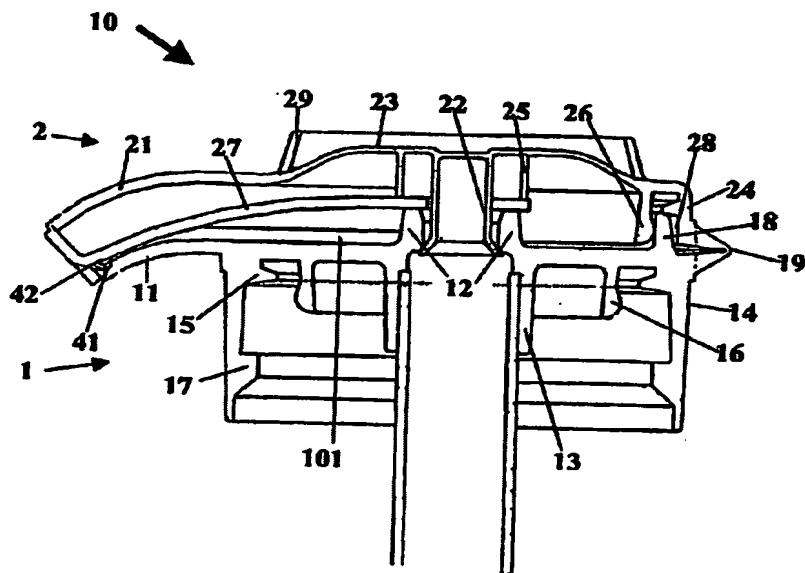

(57) Abstract: A dispensing cap for bottles consisting of a lower mounting part fixed onto neck of bottle, an upper covering part containing the dispensing parts such as valve and opening members, sealing elements between the cap and the bottle for gas-proof sealing, outlet for pouring liquid, tube support for holding the tube of siphon structure and known completing elements if necessary, characterized by that it contains an irreversibly removable fixing member (27) preventing dispensing.